



203-2100 TURBO SILENCER

Industrial Grade - 14 to 20 dB(A)



APPLICATION



An industrial grade silencer configured for use on turbo charged engines where low pressure drop is critical. Suited for environments where ambient noise levels are relatively high.

CONSTRUCTION


Heavy duty steel construction. Line of sight absorption silencer with acoustical fiberglass internal packing. Standard with ANSI Flanged connections. Additional connections available. Call factory for details.

FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 10" and smaller; and high heat black paint on sizes 12" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details.

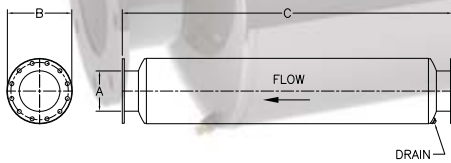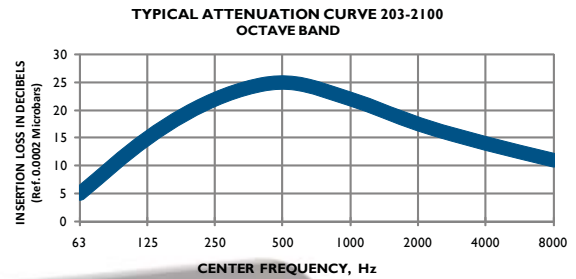

STYLE 1

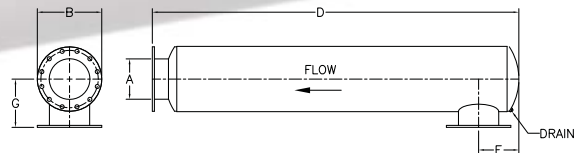

STYLE 2

Part Number	A Inlet Size	B Diameter	C OAL - Style 1	D OAL - Style 2	F	G Flange-Center	WT
203-2104	4	10	36	40	4	7.5	24
203-2105	5	10	48	52	5	9	65
203-2106	6	10	60	64	5	9	70
203-2108	8	14	66	80	7	11	125
203-2110	10	16	70	81	8	12	165
203-2112	12	18	70	81	10	13	205
203-2114	14	20	88	98	11	14	300
203-2116	16	24	108	118	12	16	425
203-2118	18	26	108	119	13	17	485
203-2120	20	28	132	155	15	18	765
203-2122	22	30	136	155	16	19	945
203-2124	24	36	196	218	18	22	1410

All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches.

Additional connections available.

All weights are in pounds. All weights are approximate.

Use diameter to find bracket sizes. Example: 203-2108 (14" dia) would require 28-1400 brackets (or similar 29 brackets).

PRICES

FREIGHT: Prepaid unless preapproved by GT Exhaust.

TERMS: Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01