

### APPLICATION




A spark arresting silencer for use on exhaust of internal combustion engines where fire hazards exist. Excellent for applications where ambient noise levels are very low and an optimal level of attenuation is required. Centrifugal force separates solids from the exhaust gas stream. Solids are then deposited in easily accessible cleanouts. The standardized A202-6100 is a more cost competitive offering than the legacy 202, while improving performance by up to 9% and even lowering volume by an average of 33%.

### CONSTRUCTION

Heavy duty steel construction. Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

### FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 10" and smaller, and high heat black paint on sizes 12" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details.

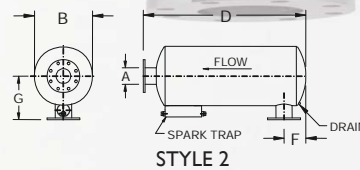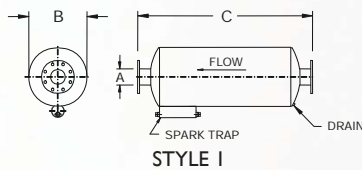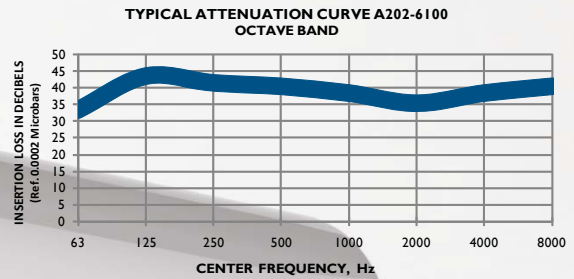

Part Number	A Inlet Size	B Diameter	C OAL - Style 1	D OAL - Style 2	F Min	F Max	G Flange-Center	WT
A202-6102	2	10	30	27	4	8	8	36
A202-61025	2.5	10	42	39	5	15	8	49
A202-6103	3	12	43	40	5	15	9	61
A202-61035	3.5	14	55	52	6	21	10	95
A202-6104	4	14	55	52	6	21	11	95
A202-6105	5	16	62	58	7	23	12	121
A202-6106	6	20	75	71	8	30	14	187
A202-6108	8	24	76	72	10	30	16	286
A202-6110	10	28	100	96	11	42	18	505
A202-6112	12	36	102	99	14	40	22	756
A202-6114	14	36	138	135	15	61	22	1027
A202-6116	16	42	140	137	16	60	25	1250
A202-6118	18	48	142	139	18	59	29	1695
A202-6120	20	48	165	162	19	72	29	1960
A202-6122	22	54	166	163	21	71	32	2248
A202-6124	24	60	167	164	23	70	35	3143

Sizes 6" and below come standard with ID Cuff / OD Tube connections.

Sizes 8" and above come standard with ANSI Flanged connections.

All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches.

Additional connections available. **See Silencer Price Book pg. 48 for breakdown of A200 part number.**

F MAX is for inlet only. All weights are in pounds. All weights are approximate.

Use diameter to find bracket sizes. Example: A202-6108 (24" dia) would require 28-2400 brackets (or similar 29 brackets).

**PRICES**

**FREIGHT:** Prepaid unless preapproved by GT Exhaust.

**TERMS:** Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01