



H5-5 (H6-5) HARMONY™ DISK

Critical Grade - 24 to 30 dB(A)

No Thermal Packing



APPLICATION




Harmony™ disk silencers feature improved insulation capabilities and advanced heat retention in a space-saving design. This low profile silencer provides extraordinary performance in a compact size, and is excellent in applications where size restriction is a critical factor.

CONSTRUCTION

Includes a compressed thermal/acoustical fiberglass packed shell. Comes standard with bottom mounted 29-H brackets, with the option of top mounted brackets.

FINISH AND OPTIONAL MATERIALS

Heavy duty steel construction with a high heat powder coat finish. Flanged inlet and outlet standard. Additional connections, as well as flush mounted inlets, are available. Stainless steel available. Call factory for details.

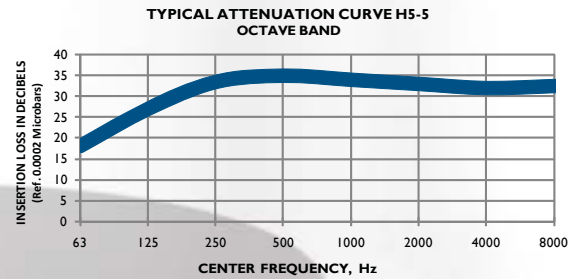

Part Number	A Inlet Size	B Diameter	C OAL	E	G	H	WT
5-5-4	4	28	32	22.07	7	6	123
5-5-5	5	28	32	22.07	8	8	139
5-5-6	6	32	36	24.9	8.5	9	173
5-5-8	8	45	49	35.15	9.5	11	328
5-5-10	10	52	56	40.1	10.5	13	434
5-5-12	12	59	63	45.05	12	16	574
5-5-14	14	65	69	49.29	14	20	725
5-5-16	16	74	78	55.66	14.5	21	914
5-5-18	18	84	88	62.73	15.5	23	1136

All spatial dimensions are in inches.
Additional connections available.
All weights are in pounds. All weights are approximate.

PRICES

For further information on quotes, please contact GT Exhaust

quotes@gtexhaust.com

1.888.894.3726

Ref.# SSB 06-01-2011-01