



H9-4 HARMONY™ SPARK ARRESTING DISK

Residential Grade - 19 to 25 dB(A)

1" Thermal Packing



APPLICATION



Space conserving, spark arresting silencer designed for use on exhaust of internal combustion engines where fire hazard exists. Centrifugal force separates solids from the exhaust gas stream. Solids are then deposited in an easily accessible cleanout. The low profile design is ideal for engine enclosures, trailers, marine, or any application in which overall height and/or low radiated heat is critical.

CONSTRUCTION

Includes a compressed thermal/acoustical fiberglass packed shell. Comes standard with bottom mounted 29-H brackets, with the option of top mounted brackets.

FINISH AND OPTIONAL MATERIALS

Heavy duty steel construction with a high heat powder coat finish. Flanged inlet and outlet standard. Additional connections, as well as flush mounted inlets, are available. Stainless steel available. Call factory for details.

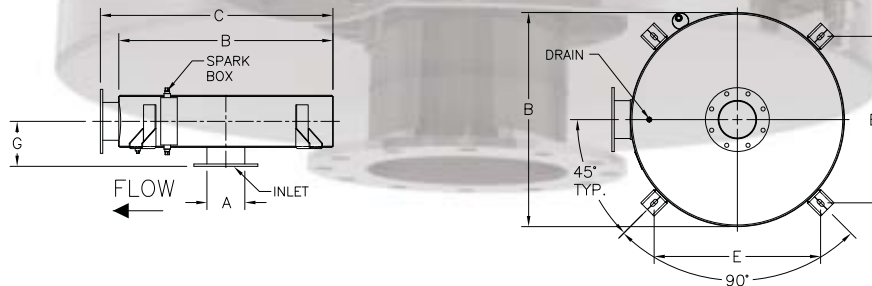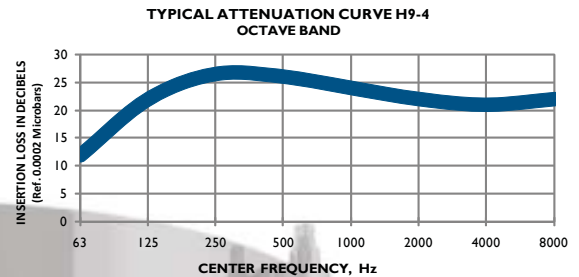

Part Number	A Inlet Size	B Diameter	C OAL	E	G	H	WT
9-4-4	4	22	26	17.83	7.5	7	105
9-4-5	5	24	28	19.24	8	8	121
9-4-6	6	28	32	22.07	8.25	8.5	149
9-4-8	8	33	37	26.66	10	12	239
9-4-10	10	41	45	32.32	10.5	13	335
9-4-12	12	45	49	35.15	12.5	17	475
9-4-14	14	52	56	40.10	13	18	550
9-4-16	16	59	63	45.05	14.5	21	728
9-4-18	18	65	69	49.29	15.5	23	838

All spatial dimensions are in inches.
Additional connections available.
All weights are in pounds. All weights are approximate.

PRICES

FREIGHT: Prepaid unless preapproved by GT Exhaust.

TERMS: Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01