

APPLICATION


Harmony™ disk silencers feature improved insulation capabilities and advanced heat retention in a space-saving design. This low profile silencer provides extraordinary performance in a compact size, and is excellent in applications where size restriction is a critical factor.

CONSTRUCTION

Includes a compressed thermal/acoustical fiberglass packed shell. In addition to its acoustical value, the one inch thick packed shell provides a reduction in the outer surface temperature. Actual values depend on the exhaust temperature and ambient conditions. Comes standard with bottom mounted 29-H brackets, with the option of top mounted brackets.

FINISH AND OPTIONAL MATERIALS

Heavy duty steel construction with a high heat powder coat finish. Flanged inlet and outlet standard. Additional connections, as well as flush mounted inlets, are available. Stainless steel available. Call factory for details.

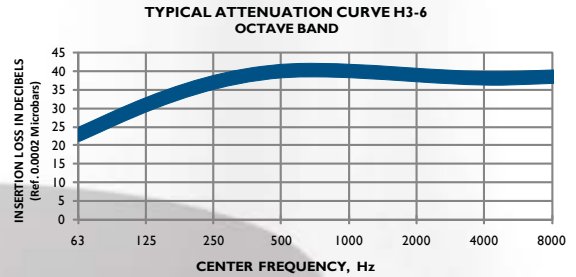

Part Number	A Inlet Size	B Diameter	C OAL	E	G	H	WT
3-6-4	4	32	36	24.9	8	8	171
3-6-5	5	33	37	25.6	8	8	182
3-6-6	6	37	41	28.43	9	10	232
3-6-8	8	52	56	40.1	10	12	447
3-6-10	10	59	63	45.05	11	14	577
3-6-12	12	70	74	52.83	12	16	811
3-6-14	14	70	74	52.83	15	22	913
3-6-16	16	74	78	55.66	17	26	1079
3-6-18	18	84	88	62.73	18	28	1343

All spatial dimensions are in inches.
Additional connections available.
All weights are in pounds. All weights are approximate.

PRICES