



H3-4 (H4-4) HARMONY™ DISK

Residential Grade - 22 to 28 dB(A)

1" Thermal Packing



APPLICATION




Harmony™ disk silencers feature improved insulation capabilities and advanced heat retention in a space-saving design. This low profile silencer provides extraordinary performance in a compact size, and is excellent in applications where size restriction is a critical factor.

CONSTRUCTION

Includes a compressed thermal/acoustical fiberglass packed shell. In addition to its acoustical value, the one inch thick packed shell provides a reduction in the outer surface temperature. Actual values depend on the exhaust temperature and ambient conditions. Comes standard with bottom mounted 29-H brackets, with the option of top mounted brackets.

FINISH AND OPTIONAL MATERIALS

Heavy duty steel construction with a high heat powder coat finish. Flanged inlet and outlet standard. Additional connections, as well as flush mounted inlets, are available. Stainless steel available. Call factory for details.

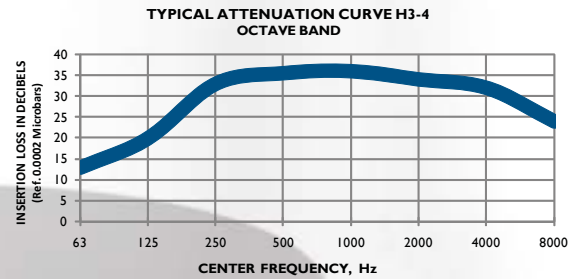

Part Number	A Inlet Size	B Diameter	C OAL	E	G	H	WT
3-4-4	4	22	26	17.83	7.5	7	103
3-4-5	5	24	28	19.24	8	8	119
3-4-6	6	28	32	22.07	8.25	8.5	147
3-4-8	8	33	37	26.66	10.5	13	242
3-4-10	10	41	45	32.32	10.5	13	329
3-4-12	12	45	49	35.15	12.5	17	464
3-4-14	14	52	56	40.1	13	18	539
3-4-16	16	59	63	45.05	14.5	21	716
3-4-18	18	65	69	49.29	15.5	23	825

All spatial dimensions are in inches.
Additional connections available.
Weights are in pounds. Weights are approximate.

PRICES

For further information on quotes, please contact GT Exhaust

quotes@gtexhaust.com

1.888.894.3726

Ref.# SSB 06-01-2011-01