

### APPLICATION




A spark arresting silencer for use on exhaust of internal combustion engines where fire hazards exist. Well suited for applications where surrounding environment requires a moderate level of silencing. Centrifugal force separates solids from the exhaust gas stream. Solids are then deposited in easily accessible cleanouts. The standardized A202-24100 is a more cost competitive offering than the legacy 202, while maintaining the integrity of the unit's performance.

### CONSTRUCTION

Heavy duty steel construction. Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

### FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 10" and smaller, and high heat black paint on sizes 12" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details.

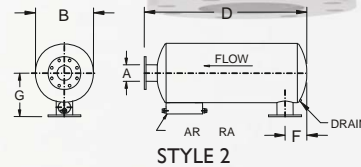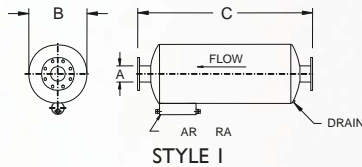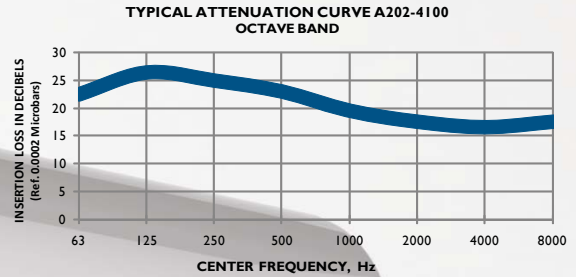

Part Number	A Inlet Size	B Diameter	C OAL - Style 1	D OAL - Style 2	F Min	F Max	G Flange-Center	WT
A202-41015	1.5	6	30	27	3	9	5	13
A202-4102	2	6	36	33	3	12	6	15
A202-41025	2.5	8	42	39	4	14	7	24
A202-4103	3	8	42	39	4	11	7	24
A202-41035	3.5	10	46	43	5	15	8	34
A202-4104	4	10	46	43	5	15	8	34
A202-4105	5	10	54	51	6	18	9	39
A202-4106	6	12	54	51	6	17	9	48
A202-4108	8	18	61	57	8	17	13	133
A202-4110	10	22	74	71	12	21	15	199
A202-4112	12	26	75	72	13	20	17	332
A202-4114	14	30	100	97	15	31	19	444
A202-4116	16	36	114	111	17	41	22	616
A202-4118	18	36	126	123	18	41	22	783
A202-4120	20	42	139	136	20	45	25	1070
A202-4122	22	48	141	138	22	43	29	1255
A202-4124	24	54	142	139	24	40	31	1482

Sizes 6" and below come standard with ID Cuff / OD Tube connections.

Sizes 8" and above come standard with ANSI Flanged connections.

All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches.

Additional connections available. [See Silencer Price Book pg. 48 for breakdown of A200 part number.](#)

F MAX is for inlet only. All weights are in pounds. All weights are approximate.

Use diameter to find bracket sizes. Example: A202-4108 (18" dia) would require 28-1800 brackets (or similar 29 brackets).

**PRICES**

**FREIGHT:** Prepaid unless preapproved by GT Exhaust.

**TERMS:** Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01